


Drum Swift AGH-SP1

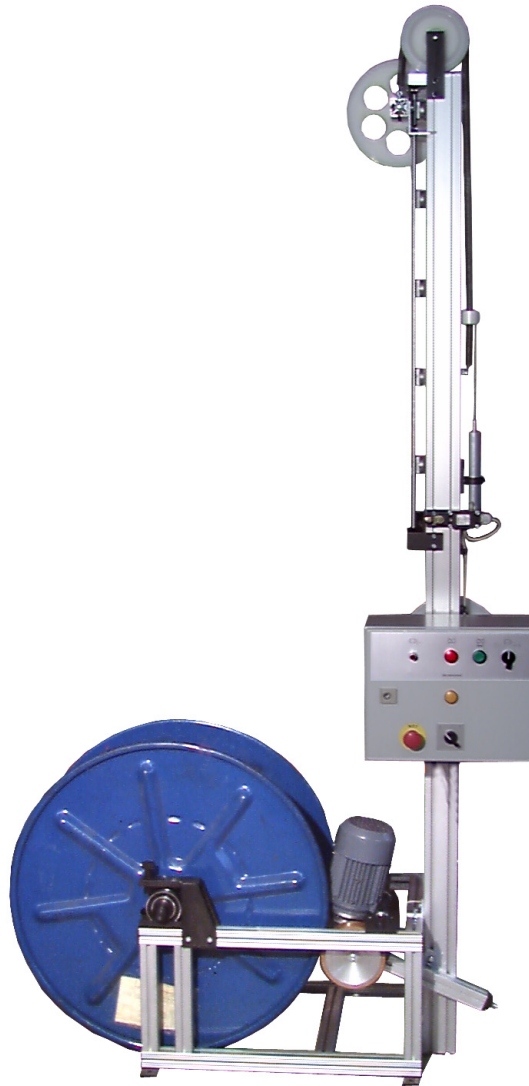

Drum swift for Sandvik and similar wiredrums

Technical data:	voltage:	230 V or 400 V
	power consumption:	0,7 kVA
	max. speed:	65 rpm
	max. drum diameter:	760 x 310, 410 or 510 mm
	max. load of drum	300 kg
	wire diameter:	0,5 -1,5 mm

The swift is best usable in a production with a continuous wire feed to the machine. Because of the motor powered with wire tension control the swift guarantees low and to the wire diameter adaptable tension forces. Beside this there are no additional radial forces on the wire feed of the coiler. With these advantages you can reach a high accuracy in wire feed which improves the quality especially on a critical production. Higher production speed of springs can be reached because of the high speed of the swift.