


AGH-1/B 150kg

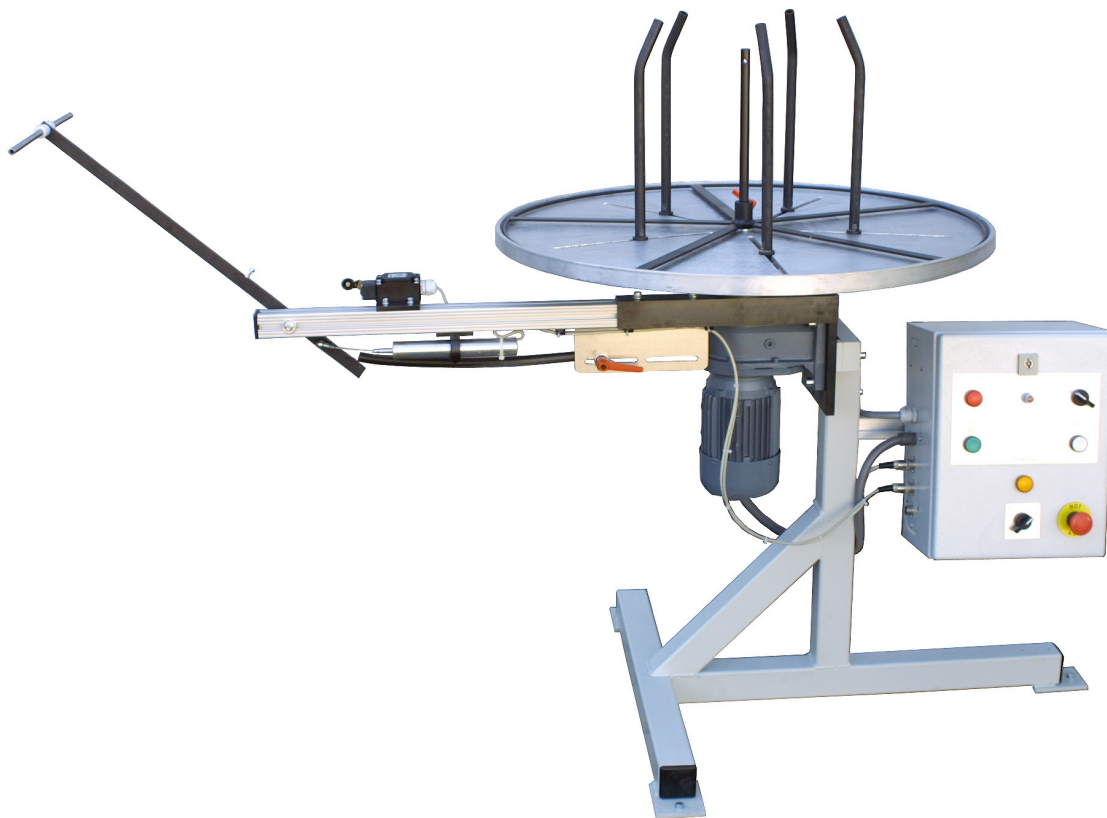

AGH 1/B 150 kg

Technical data:

power supply	230V or 400 V
power consumption	0,7 kW
wire diameter	0,7 - 3mm
linner diameter of drum or ring	170 - 690mm
max. height of drum or ring	150mm
max. load of ring or drum	150 kg
max. speed	100 rpm
diameter of table	800 mm

On the swift AGH 1/B 150 kg the wire can be placed horizontal on rings or drums. The swift is designed for continuous wirefeed as well as for intermittant wirefeed. Because of the electronic controlled motor with tensioncontrol the swift guarantees low and to the wire diameter adaptable tensionforces. Beside this there are no additional radial forces on the wirefeed of the coiler. With these advantages you can reach a high accuracy in wirefeed which improves the quality especially on a critical production. Higher production speed of springs can be reached because of the high speed of the swift.