


# AGH-3

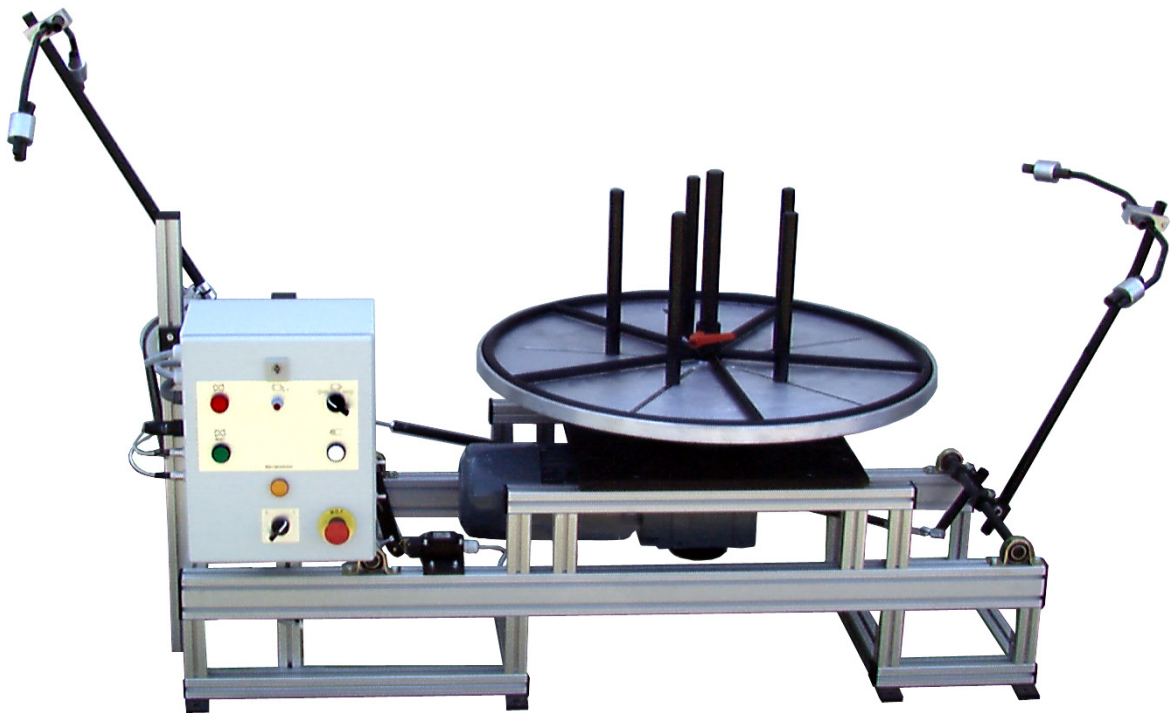

## AGH 3

### Technical data:

power supply	230 V or 400 V
power consumption	app. 1 KW
wire diameter	app. 1 - 3 mm
max. outside dia. of spool	app. 750 mm
min. inner dia. of spool	app. 150 mm
max. height of spool	app. 240 mm
diameter of table	app. 800 mm
max. weight	400 kg
max. speed	90 rpm

On the swift AGH3 the wire can be placed horizontal on rings or drums. The swift is designed for continuous wirefeed as well as for intermittent wirefeed. Because of the electronic controlled motor with tension control the swift guarantees low and to the wire diameter adaptable tension forces. Beside this there are no additional radial forces on the wirefeed of the coiler. With these advantages you can reach a high accuracy in wirefeed which improves the quality especially on a critical production. Higher production speed of springs can be reached because of the high speed of the swift.